



MEETS IWUIC IGNITION RESISTANCE CODES

Trex Refuge™ decking is engineered from PVC cellular material and finished with a proprietary protective shell that delivers a rich, natural, wood-like grain. Designed as a high-performance alternative to naturally durable hardwoods, Trex Refuge meets IWUIC requirements and carries a Class A Flame Spread Rating validated through independent lab testing per ASTM E84, ASTM D7032, ASTM E2768, and CSFM 12-7A-4.

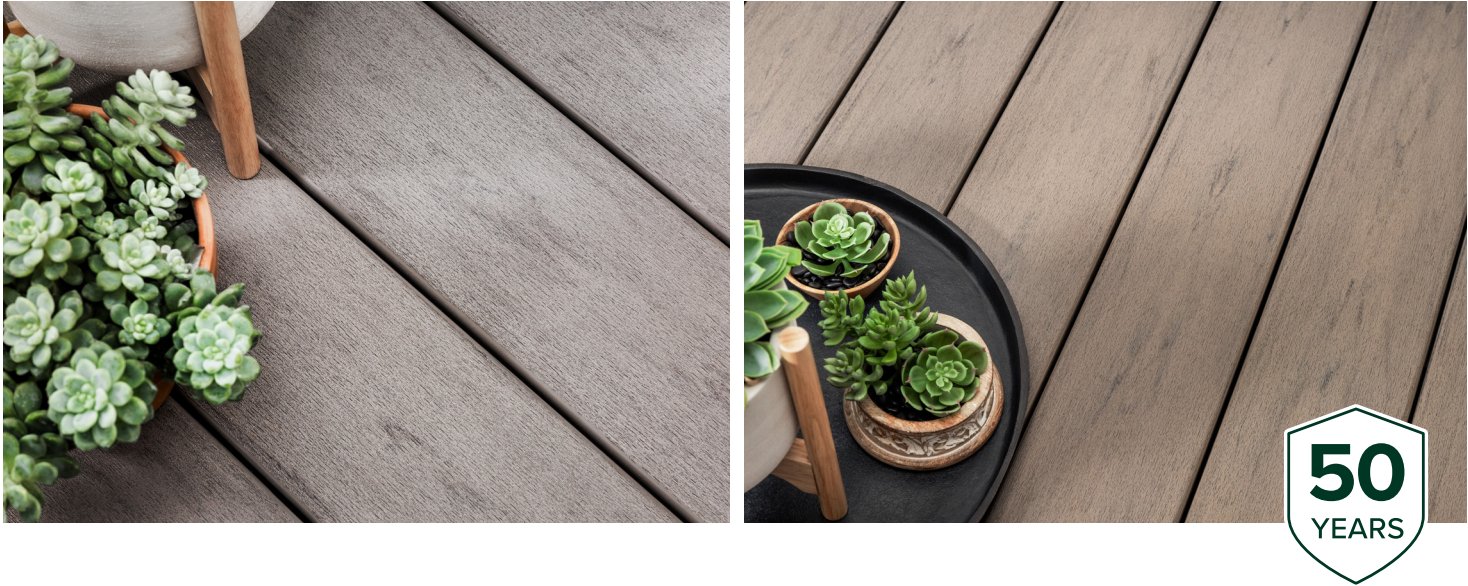

DECKING

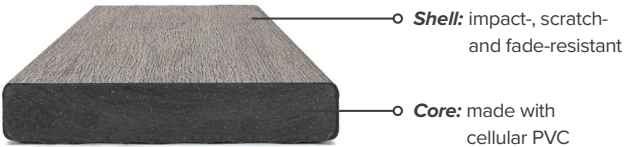

1" Square edge

FEATURES	1" x 6" Square edge
Actual Dimensions - Standard	.94" x 5.5"
Actual Dimensions - Metric	24 mm x 140 mm
Available Lengths - Standard	16', 20'
Available Lengths - Metric	487 cm, 609 cm
Weight per Lineal Foot	1.53 lbs

PHYSICAL & MECHANICAL PROPERTIES

TEST	TEST METHOD	VALUE
Flame Spread	ASTM E 84	Class A
Thermal Expansion Length	ASTM D 1037	2.4×10^{-5} in/in/°F
Thermal Expansion Width	ASTM D 1037	1.9×10^{-5} in/in/°F

*Fastener used in testing: #8 x 2.5" approved Stainless Steel Screw

COLORS

